Appendix B

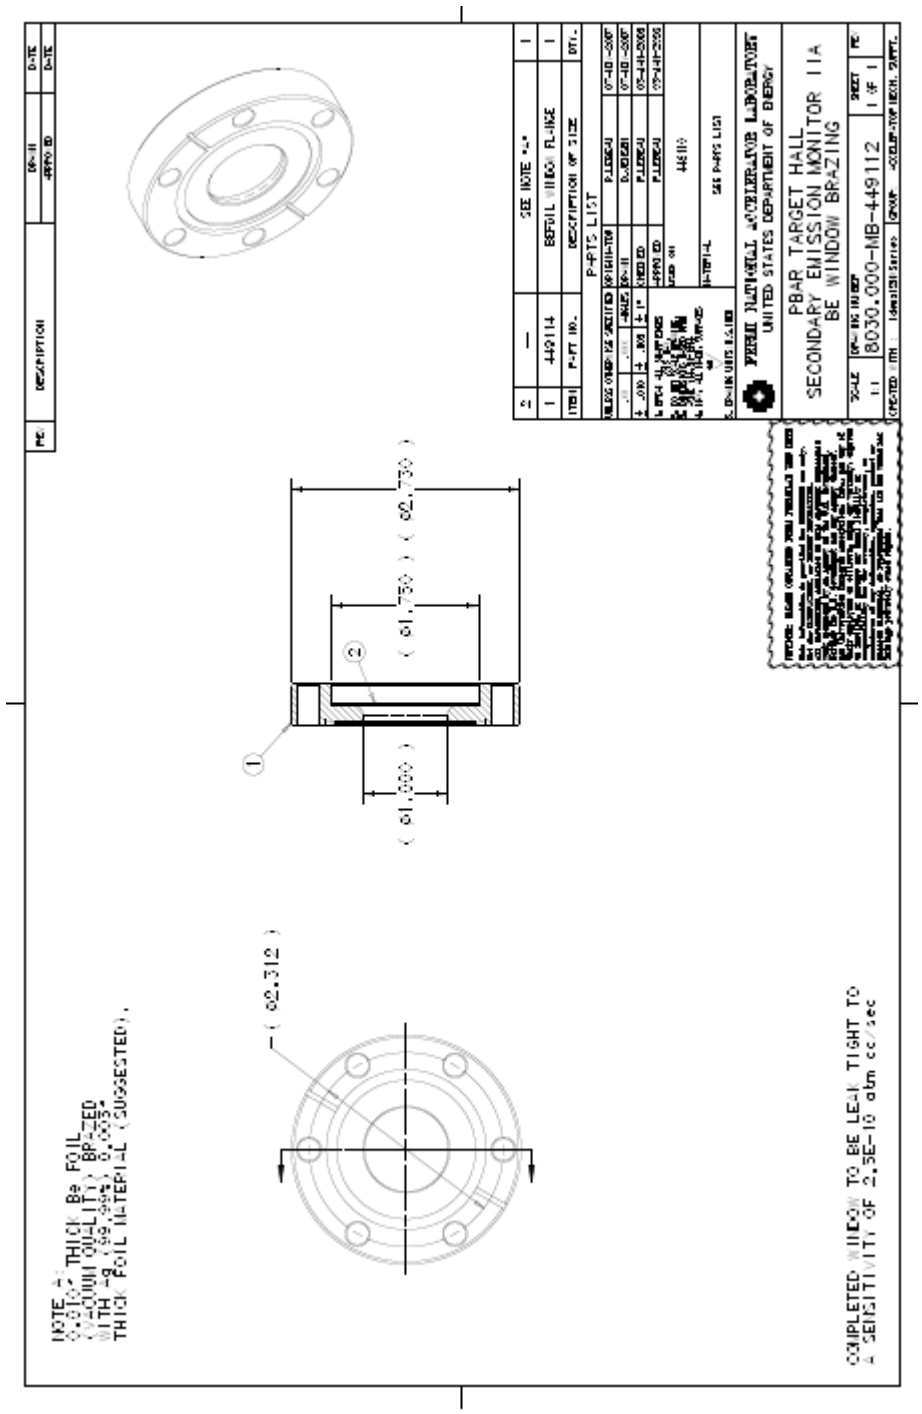

NOTE A:
0.010" THICK Be FOIL
(VACUUM QUALITY) BRAZED
WITH Ag (99.99%) 0.003"
THICK FOIL MATERIAL (SUGGESTED).
(ø2.312)
(ø1.000)
(ø1.750)
(ø2.730)
COMPLETED WINDOW TO BE LEAK TIGHT TO
A SENSITIVITY OF 2.5E-10 atm cc/sec
SEE NOTE "A"
BEFOIL WINDOW FLANGE
DESCRIPTION OF SIZE
P-PTS LIST
FERMI NATIONAL ACCELERATOR LABORATORY
UNITED STATES DEPARTMENT OF ENERGY
PBAR TARGET HALL
SECONDARY EMISSION MONITOR IIA
BE WINDOW BRAZING
8030.000-MB-449112